



LED NAPAJANIE ZDROJE

TRACONELECTRIC.COM

TRACON SLOVAKIA S.R.O., ROZMARÍNOVÁ 10, 945 01 KOMÁRNO

 035/77 31 082, 77 33 251  ODBYT@TRACON.SK • TRACON@TRACON.SK

Napájací zdroj s kovovým telom



**15-350
W**


**12/24V
DC**








**IP
20**



**2
YEARS
WARRANTY**


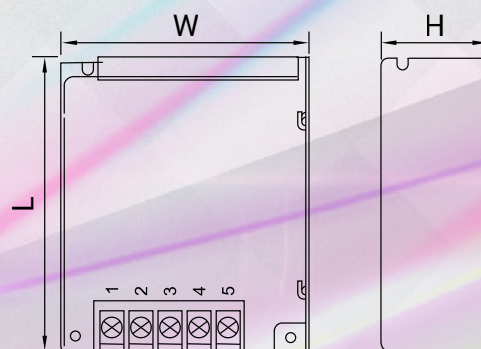


TRACON						η %	L x W x H (mm)
LDCV-15-12	15 W	90-264 VAC	10,8-13,2 VDC	0,25 A	0 - 1,3 A	81 %	88x58x30
LDCV-15-24	15 W	90-264 VAC	21,6-26,4 VDC	0,25 A	0 - 0,7 A	83 %	88x58x30
LDCV-25-12	25 W	90-264 VAC	10,8-13,2 VDC	0,35 A	0 - 2,1 A	82 %	88x58x30
LDCV-25-24	25 W	90-264 VAC	21,6-26,4 VDC	0,35 A	0 - 1,1 A	83 %	88x58x30
LDCV-35-12	35 W	90-264 VAC	10,8-13,2 VDC	0,45 A	0 - 3,0 A	81 %	88x58x30
LDCV-35-24	35 W	90-264 VAC	21,6-26,4 VDC	0,45 A	0 - 1,5 A	83 %	88x58x30
LDCV-50-12	50 W	90-264 VAC	10,8-13,2 VDC	0,56 A	0 - 4,2 A	86 %	99x82x30
LDCV-50-24	50 W	90-264 VAC	21,6-26,4 VDC	0,56 A	0 - 2,2 A	88 %	99x82x30
LDCV-75-12	75 W	90-264 VAC	10,8-13,2 VDC	0,7 A	0 - 6,3 A	85 %	111x78x31
LDCV-75-24	75 W	90-264 VAC	21,6-26,4 VDC	0,7 A	0 - 3,2 A	86 %	111x78x31
LDCV-100-12	100 W	90-264 VAC	10,8-13,2 VDC	1,2 A	0 - 8,5 A	88 %	129x97x30
LDCV-100-24	100 W	90-264 VAC	21,6-26,4 VDC	1,2 A	0 - 4,5 A	90 %	129x97x30
LDCV-150-12	150 W	90-264 VAC	10,8-13,2 VDC	1,6 A	0 - 12,5 A	88 %	159x97x30
LDCV-150-24	150 W	90-264 VAC	21,6-26,4 VDC	1,6 A	0 - 6,5 A	87 %	159x97x30
LDCV-200-12	200 W	90-264 VAC	10,8-13,2 VDC	2,2 A	0 - 17,0 A	87 %	203x99x29
LDCV-200-24	200 W	90-264 VAC	21,6-26,4 VDC	2,2 A	0 - 8,8 A	89 %	203x99x29
LDCV-350-12	350 W	90-264 VAC	10,8-13,2 VDC	3,4 A	0 - 29,0 A	85 %	215x115x30
LDCV-350-24	350 W	90-264 VAC	21,6-26,4 VDC	3,4 A	0 - 14,6 A	88 %	215x115x30

Napájací zdroj s plastovým telom so zvýšeným krytím



18-100 W	12/24V DC	IP 67
---------------------	----------------------	------------------

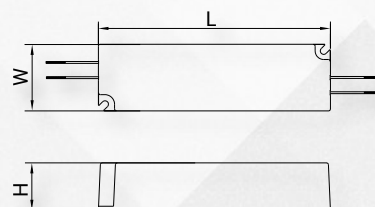


TRACON						$\eta\%$	L x W x H (mm)
LDCVIP-18-12	18 W	180-264 VAC	12 VDC	0,3 A	0 - 1,5 A	77 %	141x30x24
LDCVIP-18-24	18 W	180-264 VAC	24 VDC	0,3 A	0 - 0,75 A	82 %	141x30x24
LDCVIP-20-12	20 W	90-264 VAC	12 VDC	0,35 A	0 - 1,67 A	81 %	118x35x26
LDCVIP-20-24	20 W	90-264 VAC	24 VDC	0,35 A	0 - 0,84 A	83 %	118x35x26
LDCVIP-35-12	35 W	90-264 VAC	12 VDC	0,7 A	0 - 3 A	84 %	149x40x30
LDCVIP-35-24	35 W	90-264 VAC	24 VDC	0,7 A	0 - 1,5 A	85 %	149x40x30
LDCVIP-60-12	60 W	90-264 VAC	12 VDC	1,0 A	0 - 5 A	83 %	164x42x32
LDCVIP-60-24	60 W	90-264 VAC	24 VDC	1,0 A	0 - 2,5 A	86 %	164x42x32
LDCVIP-100-12	100 W	90-264 VAC	12 VDC	1,2 A	0 - 8,5 A	85 %	193x54x37
LDCVIP-100-24	100 W	90-264 VAC	24 VDC	1,2 A	0 - 4,2 A	88 %	193x54x37

Napájací zdroj s kovovým telom so zvýšeným krytím



15-320 W	12/24V DC	IP 67
---------------------	----------------------	------------------

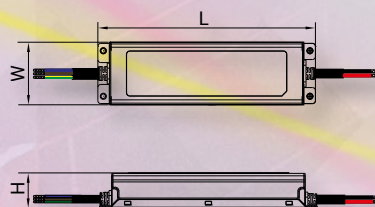


TRACON						$\eta\%$	L x W x H (mm)
LDCVIP-150-12	150 W	100-240 VAC	12 VDC	1,0 A	0 - 12,5 A	88,50 %	200x61x35
LDCVIP-150-24	150 W	100-240 VAC	24 VDC	1,0 A	0 - 6,3 A	91 %	200x61x35
LDCVIP-200-12	200 W	90-264 VAC	12 VDC	1,6 A	0 - 16,5 A	90 %	246x70x38
LDCVIP-200-24	200 W	90-264 VAC	24 VDC	1,6 A	0 - 8,5 A	92 %	246x70x38
LDCVIP-240-12	240 W	100-240 VAC	12 VDC	2,0 A	0 - 20 A	89 %	246x70x38
LDCVIP-240-24	240 W	100-240 VAC	24 VDC	2,0 A	0 - 10 A	92 %	246x70x38
LDCVIP-320-12	320 W	100-240 VAC	12 VDC	4,0 A	0 - 26,5 A	89 %	246x70x38
LDCVIP-320-24	320 W	100-240 VAC	24 VDC	4,0 A	0 - 13,3 A	92 %	246x70x38









LED pás, interiérový (24 V)



24 V
DC

IP
20



TRACON						IP..	 LED	
LED-SZ24-48-CW	4.8 W/m	480 lm / m	8 mm	6.000 K	100 mm	IP 20	60 × SMD2835 / m	
LED-SZ24-48-NW	4.8 W/m	480 lm / m	8 mm	4.000 K	100 mm	IP 20	60 × SMD2835 / m	
LED-SZ24-48-WW	4.8 W/m	480 lm / m	8 mm	3.000 K	100 mm	IP 20	60 × SMD2835 / m	
LED-SZ24-96-CW	9.6 W/m	960 lm / m	8 mm	6.000 K	50 mm	IP 20	120 × SMD2835 / m	
LED-SZ24-96-NW	9.6 W/m	960 lm / m	8 mm	4.000 K	50 mm	IP 20	120 × SMD2835 / m	
LED-SZ24-96-WW	9.6 W/m	960 lm / m	8 mm	3.000 K	50 mm	IP 20	120 × SMD2835 / m	
LED-SZ24-144-CW	14.4 W/m	1.440 lm / m	10 mm	6.000 K	100 mm	IP 20	60 × SMD5050 / m	
LED-SZ24-144-NW	14.4 W/m	1.440 lm / m	10 mm	4.000 K	100 mm	IP 20	60 × SMD5050 / m	
LED-SZ24-144-WW	14.4 W/m	1.440 lm / m	10 mm	3.000 K	100 mm	IP 20	60 × SMD5050 / m	
LED-SZ24-144-RGB	14.4 W/m	1.440 lm / m	10 mm	RGB	100 mm	IP 20	60 × SMD5050 / m	








LED pás, exteriérový (24 V)



24 V
DC

IP
65



TRACON						IP..	 LED	
LED-SZK24-48-CW	4.8 W/m	480 lm / m	8 mm	6.000 K	100 mm	IP 65	60 × SMD2835 / m	
LED-SZK24-48-NW	4.8 W/m	480 lm / m	8 mm	4.000 K	100 mm	IP 65	60 × SMD2835 / m	
LED-SZK24-48-WW	4.8 W/m	480 lm / m	8 mm	3.000 K	100 mm	IP 65	60 × SMD2835 / m	
LED-SZK24-96-CW	9.6 W/m	960 lm / m	8 mm	6.000 K	50 mm	IP 65	120 × SMD2835 / m	
LED-SZK24-96-NW	9.6 W/m	960 lm / m	8 mm	4.000 K	50 mm	IP 65	120 × SMD2835 / m	
LED-SZK24-96-WW	9.6 W/m	960 lm / m	8 mm	3.000 K	50 mm	IP 65	120 × SMD2835 / m	
LED-SZK24-144-CW	14.4 W/m	1.440 lm / m	10 mm	6.000 K	100 mm	IP 65	60 × SMD5050 / m	
LED-SZK24-144-NW	14.4 W/m	1.440 lm / m	10 mm	4.000 K	100 mm	IP 65	60 × SMD5050 / m	
LED-SZK24-144-WW	14.4 W/m	1.440 lm / m	10 mm	3.000 K	100 mm	IP 65	60 × SMD5050 / m	
LED-SZK24-144-RGB	14.4 W/m	1.440 lm / m	10 mm	RGB	100 mm	IP 65	60 × SMD5050 / m	

VIAC INFORMÁCIÍ NÁJDETE NA NAŠEJ WEBOVEJ STRÁNKE,
V APLIKÁCII ALEBO U NAŠICH OBCHODNÝCH ZÁSTUPCOV!

 035/77 31 082, 77 33 251  ODBYT@TRACON.SK · TRACON@TRACON.SK