


ESPD1+2-50-1P; ESPD1+2-50-2P; ESPD1+2-50-3P; ESPD1+2-50-4P
Surge arresters are suitable for TN system.



SPD classification according to EN 61643-11	Type 1 + Type 2
SPD classification according to IEC 61643-11	Class I + Class II
Nominal operating voltage	Un 230/400VAC
Max. continuous operating voltage	Uc 385VAC
Lightning impulse current (10/350µs)	Iimp 50kA
Nominal discharge current (8/20µs)	In 50kA
Max. discharge current (8/20µs)	I _{max} 160kA
Voltage protection level (max.)	Up ≤2.5kV
Follow current extinguishing capability	I _{fi} 3kA rms
Max. backup fuse	500A gG
Response time	t _a ≤100ns
Operating temperature range	Tu -40°C-80°C
Operating state/fault indication	green LED (OK)
Cross-section area (Min.)	4mm ²
Cross-section area (Max.)	35mm ²
For mounting on	35mm DIN rail
Enclosure material	UL94-V0
Degree of protection	IP20

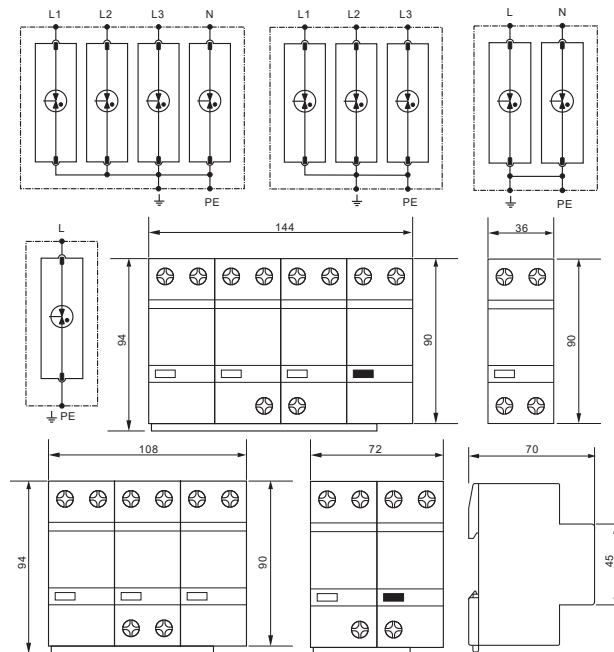

Made in P.R.C.

www.traconelectric.com

HU Más nyelvek elérhetőek a weboldalunkon.
DE Weitere Sprachen finden Sie auf unserer Website.
SK Ostatné jazyky sú k dispozícii na našej webovej stránke.
RO Alte limbi sunt disponibile pe site-ul nostru.
PL Inne języki są dostępne na naszej stronie internetowej.
SI Drugi jeziki so na voljo na naši spletni strani.

RS Ostali jezici su dostupni na našoj web stranici.
CZ Další jazyky jsou k dispozici na našich webových stránkách.
HR Ostali jezici dostupni su na našoj web stranici.
IT Altre lingue sono disponibili sul nostro sito web.
FR D'autres langues sont disponibles sur notre site Internet.
ES Otros idiomas están disponibles en nuestro sitio web.



Tracon Budapest Kft
H-2120 Dunakeszi, Pállag u. 23.