

TRACON

ESPD2-DC40-600; ESPD2-DC40-1000

Surge arresters are suitable for PV system.

Type		ESPD2-DC40-600	ESPD2-DC40-1000
SPD classification according to EN 50539-11		Type 2	Type 2
SPD classification according to IEC 50539-11		Class II	Class II
Norminal operating voltage	Unpv	600VDC	1000VDC
Max. continuous operating voltage	Ucpv	800VDC	1200VDC
Nominal discharge current(8/20μs)	In	20kA	20kA
Max. discharge current (8/20μs)	Imax	40kA	40kA
Voltage protection level (max.) [(DC+/DC-)->PE]	Up	≤3.0kV	≤4.0kV
Response time	t_A	≤100ns	
Operating temperature range	Tu	-40℃-80℃	
Operating state/fault indication		green/red	
Cross-section area (Min.)		4mm^2	
Cross-section area (Max.)		35mm^2	
For mounting on		35mm DIN rail	
Enclosure material		UL94-V0	
Degree of protection		IP20	



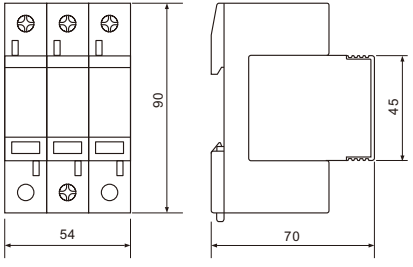

Made in P.R.C.

www.traconelectric.com

HU Más nyelvek elérhetőek a weboldalunkon.
DE Weitere Sprachen finden Sie auf unserer Website.
SK Ostatné jazyky sú k dispozícii na našej webovej stránke.
RO Alte limbi sunt disponibile pe site-ul nostru.
PL Inne języki są dostępne na naszej stronie internetowej.
SI Drugi jeziki so na voljo na naši spletni strani.

RS Ostali jezici su dostupni na našoj veb stranici.
CZ Další jazyky jsou k dispozici na našich webových stránkách.
HR Ostali jezici dostupni su na našoj web stranici.
IT Altre lingue sono disponibili sul nostro sito web.
FR D'autres langues sont disponibles sur notre site Internet.
ES Otros idiomas están disponibles en nuestro sitio web.

CE

Tracon Budapest Kft
H-2120 Dunakeszi, Pallag u. 23.