

FLECU Főáramköri leágazó kapocs, sínre szerelhető

400 V AC	V0 UL94	 U_i 1000 V	 Al/Cu	 Cu-sn	 PA6.6	 35×7.5	IP 20
-----------------	-------------------	--	--	--	--	---	------------------------

TRACON		 mm²				 In	W (mm)	L (mm)	H (mm)	X 
		  IN		  OUT						
FLECU-25-25-2										
FLECU-25-25-2F										
FLECU-25-25-2B		2×25	2×16	2×25	2×16	101 A	21.3	43.9	41.2	4×M6
FLECU-25-25-2K										
FLECU-25-25-2ZS										
FLECU-25-16-2										
FLECU-25-16-2F										
FLECU-25-16-2B		2×25	2×16	2×16	2×10	101 A	21.3	43.9	40	2×M6 ; 2×M5
FLECU-25-16-2K										
FLECU-25-16-2ZS										
FLECU-25-16-3										
FLECU-25-16-3F										
FLECU-25-16-3B		2×25	2×16	4×16	4×10	101 A	27.2	43.9	40	2×M6 ; 4×M5
FLECU-25-16-3K										
FLECU-25-16-3ZS										
FLECU-25-16-4										
FLECU-25-16-4F										
FLECU-25-16-4B		2×25	2×16	6×16	6×10	101 A	36.5	43.9	40	2×M6 ; 6×M5
FLECU-25-16-4K										
FLECU-25-16-4ZS										



FLECU-25-25-2



FLECU-25-16-2F




FLECU-25-16-3K



FLECU-25-16-4B






FLECU-25-16-4ZS

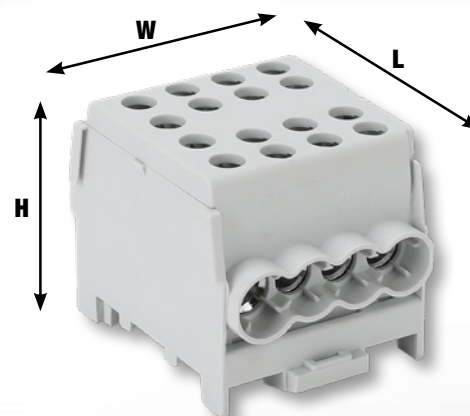

FLECU Főáramköri leágazó kapocs, sínre szerelhető

400 V AC	V0 UL94	 U_i 1000 V	 Al/Cu	 Cu-sn	 PA6.6	 35×7.5	IP 20
-----------------	-------------------	--	--	--	--	---	-----------------

TRACON		 mm²						I_n	W (mm)	L (mm)	H (mm)	X 
FLECU-35-25-2												
FLECU-35-25-2F												
FLECU-35-25-2B		2×35	2×25	2×25	2×16	125 A	24.5	54.8	42.7	2×M8 ; 2×M6		
FLECU-35-25-2K												
FLECU-35-25-2ZS												
FLECU-35-25-3												
FLECU-35-25-3F												
FLECU-35-25-3B		2×35	2×25	4×25	4×16	125 A	34.2	54.8	42.7	2×M8 ; 4×M6		
FLECU-35-25-3K												
FLECU-35-25-3ZS												
FLECU-35-25-4												
FLECU-35-25-4F												
FLECU-35-25-4B		2×35	2×25	6×25	6×16	125 A	43.8	54.8	42.7	2×M8 ; 6×M6		
FLECU-35-25-4K												
FLECU-35-25-4ZS												



FLECU-35-25-2





FLECU-35-25-2F



FLECU-35-25-3K



FLECU-35-25-3B

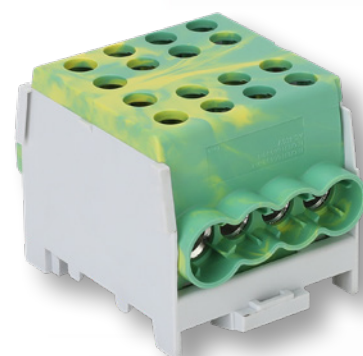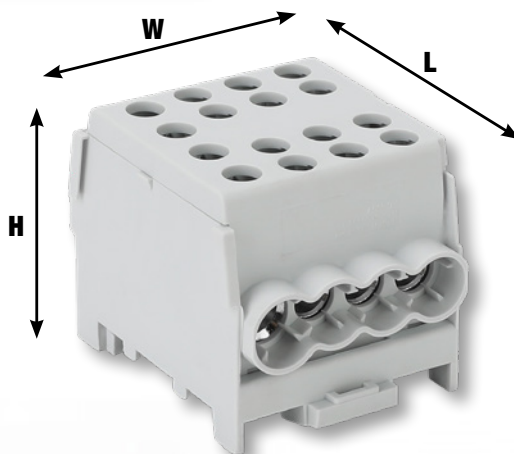

FLECU-35-25-4ZS